



ACCESSORY BUILDING WORKSHEET

Please select:

- Attached Building
 Detached Building

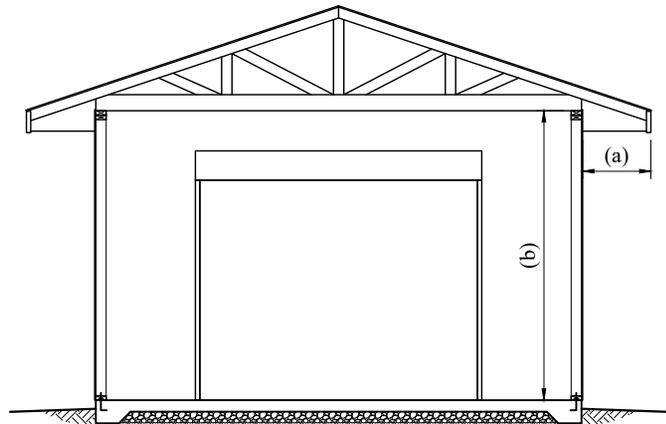

DETACHED SECTION

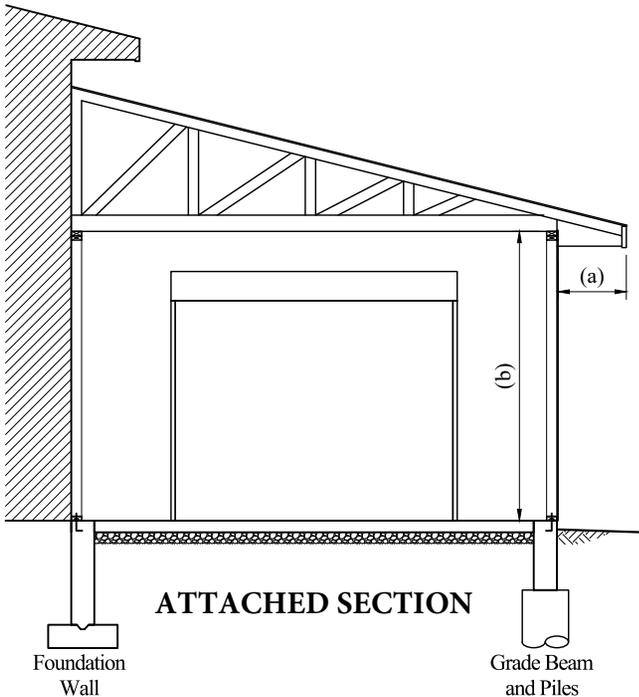

ATTACHED SECTION

Please complete the following:

ROOF:

Roofing:

- Asphalt Shingles Metal Roofing Other: _____

Roof Sheathing:

- OSB Plywood Other: _____

Thickness of Sheathing:

- 3/8" 7/16" Other: _____

Roof Structure:

- Pre-engineered
 Other: _____

Provide additional information (size, spacing, ...etc.)

Spacing of Trusses:

- 16" o.c. 24" o.c.

Roof Overhang (a): _____

Roof Slope: _____

FOUNDATION:

- Thickened Edge Slab: **(Detached Only)**

Depth _____ x Width _____

Depth of Existing House Foundation: _____

- Foundation Wall

Wall: Height _____ x Thickness _____
 Footing: Height _____ x Thickness _____

- Grade Beam and Piles

Grade Beam: Width _____ x Depth _____
 Reinforcing _____
 Pile: Diameter _____ x Depth _____
 Reinforcing _____

- Other: _____

Provide additional information

WALLS:

Exterior Siding:

- Vinyl Stucco Other: _____
 Hardboard Metal _____

Air Barrier:

- House Wrap Building Paper

Wall Sheathing:

- OSB Plywood

Thickness of Sheathing:

- 3/8" 1/2" Other: _____

Wall Framing: 2x _____ @ 16" o.c. 24" o.c.

Height of Exterior Walls (b): _____

Wall Anchorage:

- 3/8" Bolts 1/2" Bolts

Spacing of Bolts: _____

Lintel Size and Number of Plies for:

Man Door(s): 2 3 - 2x _____

Window(s): 2 3 - 2x _____

Size of Window: _____ x _____

Overhead Door(s): 2 3 - 2x _____

Size of Overhead Door: _____ x _____

INTERIOR FINISHES:

Will the building:

- have insulation installed Yes No
- have vapour barrier installed Yes No
- have interior finishes installed Yes No
- have any plumbing fixtures Yes No
- be heated Yes No

DOOR (INTO HOUSE): (Attached Only)

- Weather stripped
 Self-closer
 Deadbolt Lock
 Blocked at lock-height to frame
 Hinges secured to solid wood frame
 No openable windows

NOTE: Air duct systems cannot be interconnected with other parts of dwelling unit.

Owner's Name: _____

Address: _____

